Eurotrac
Stougjesdijk 153 3271KB
Mijnsheerenland NL
info@eurotrac.nl
+31 (0) 186 612333

EUROTRAC W11 EM

Eurotrac W11-EM 100% Electric,

Fitted as standard with:

- Lithium battery 51.2V-412A
- Internal 220-volt battery charger
- Hydr. quick coupler
- Extra hydraulic function
- Light bar / road lighting
- Tyre size 26.x12-12AS

€33,150.00

Specifications

ELECTRIC MOTOR

Driving motor	10
Running time	6 uur

HYDRAULIC SYSTEM

Oil yield	30
Workload	170 bar

WEIGHT

Lifting frame horizontal & machine straight	1050
Lifting frame horizontal & machine tilted	700 kg
Max. Lifting capacity	1250
Own weight	2200

Technical drawing

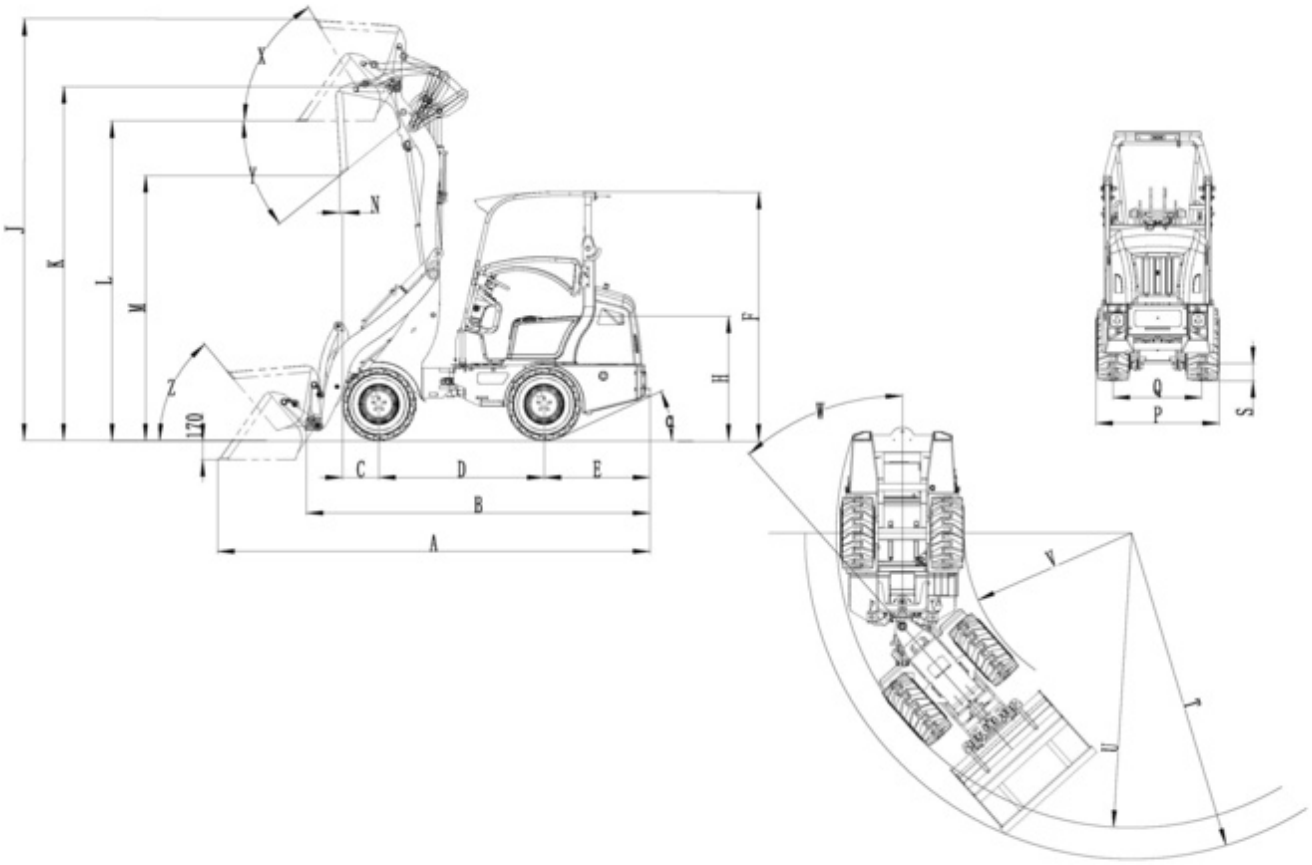
X
Y
N
J
K
L
M
Z
120
F
H
G
C
D
E
B
A
W
V
U
T
Q
P
S

(A) Overall length with bin	4080
(B) Overall length without bin	3079
(C) Bin pivot	550
(D) Cradle base	1480
(E) Rear overhang	948
(F) Height to top of roof	2200
(H) Seat height	1190
(J) Total working height	3070
(K) Max. lifting height	2500
(L) Loading height	2255
(M) Ejection height	1820
(N) Range (m)	529
(O) Digging depth	17
(P) Overall width	1104
(Q) Track width	803
(S) Ground clearance	178
(T) Outer diameter	2646
(U) Turning circle	2928
(V) Inside turning circle	1503
(W) Rotation angle	45
(X) Tilting angle at max. lifting height	59
(Y) Tipping angle	39
(Z) Tilt-in angle	50

Pictures

Eurotrac