



Eurotrac

Stougjesdijk 153 3271KB
Mijnsheerenland NL
info@eurotrac.nl
+31 (0) 186 612333

EUROTRAC W12 CIF

The Eurotrac W12-CIF for agricultural and industrial use

Fitted as standard with:



- Yanmar Stage-V engine
- 3 Cylinder, 44 HP
- Joystick controls
- Extra hydraulic function on joystick
- Quick coupler
- Hydrostatic with 2 travel speeds
- Heavy duty axles with hub reduction
- LED lights/working lights
- Wide tyres 19.0/45-17

€34,400.00

Specifications

ELECTRICAL INFORMATION

Battery capacity	70
Electric system	12 V

ENGINE

Cooling	Liquid
Engine power	44

HYDRAULIC SYSTEM

Oil yield	50
Workload	180 bar



OTHER

Diesel tank	45
Hydro tank	40

WEIGHT

Lifting frame horizontal & machine straight	1650
Lifting frame horizontal & machine tilted	1000 kg
Max. Lifting capacity	2000
Own weight	2620

Technical drawing

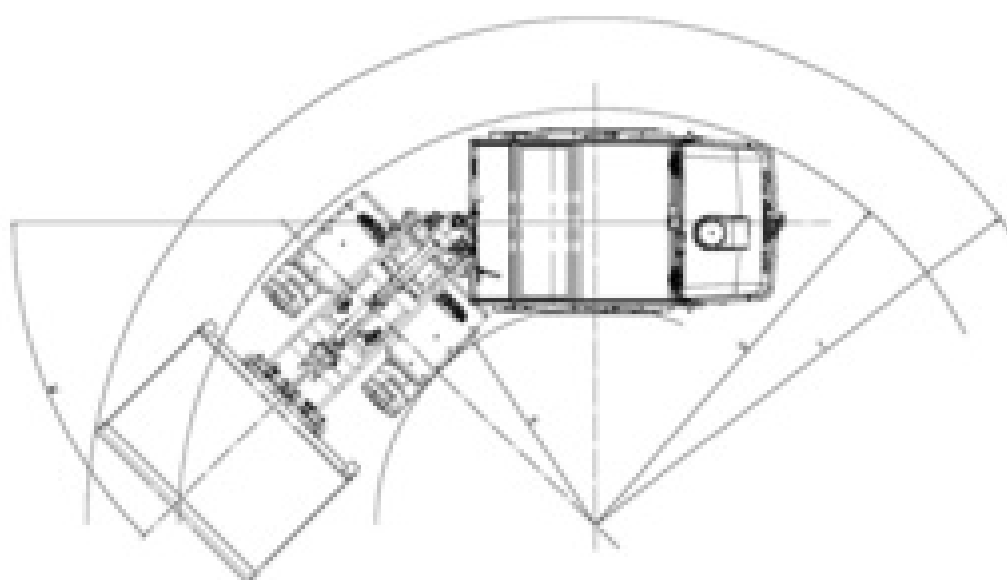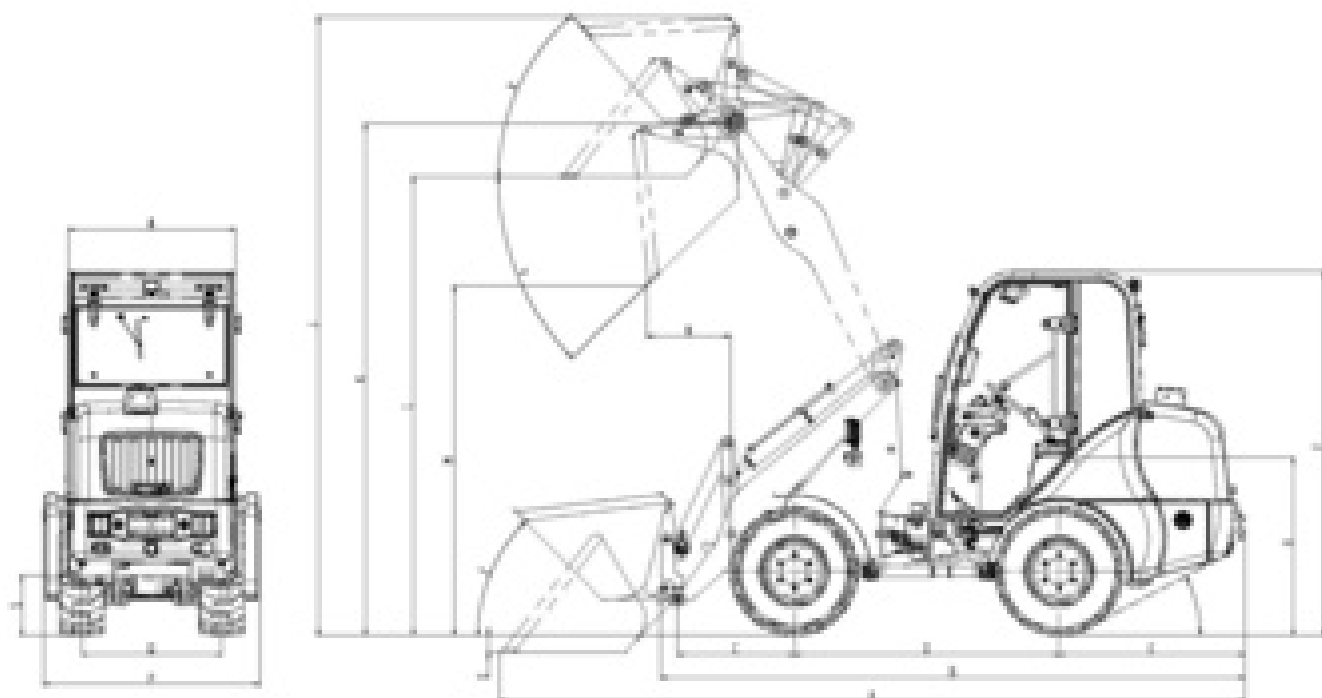

(A) Overall length with bin	4650
(B) Overall length without bin	3720
(C) Bin pivot	710
(D) Cradle base	1730
(E) Rear overhang	1140
(F) Height to top of roof	710
(H) Seat height	1310
(J) Total working height	2690
(K) Max. lifting height	2200
(L) Loading height	1770
(M) Ejection height	1625
(N) Range (m)	550
(O) Digging depth	60
(P) Overall width	1500
(Q) Track width	1040
(S) Ground clearance	255
(T) Outer diameter	3250
(U) Turning circle	2750
(V) Inside turning circle	1500
(W) Rotation angle	45
(X) Tilting angle at max. lifting height	48
(Y) Tipping angle	45
(Z) Tilt-in angle	50

Pictures





