



Eurotrac

Stougjesdijk 153 3271KB
Mijnsheerenland NL
info@eurotrac.nl
+31 (0) 186 612333

EUROTRAC WL18

Fitted as standard with:



- Kubota V3307 Stage V diesel engine
- Linde hydrostatic drive
- Comer axles and gearbox (Italy)
- ROPS/FOPS-certified cab with air conditioning
- Air-suspended comfort seat
- Electro-hydraulic joystick with FNR switch
- ISO quick-change system (including standard ground bucket and pallet forks)
- 3rd function (additional hydraulic lines)
- Hydraulically driven cooling fan
- Cast counterweight
- 405/70R20 radial tyres
- All-round LED lighting package
- 360° camera system (four cameras)
- Maximum travel speed: 35 km/h

€59,500.00

Specifications

ELECTRICAL INFORMATION

Battery capacity	115
Electric system	12 V

ENGINE

Engine power	75
--------------	----

HYDRAULIC SYSTEM

Workload	235 bar
----------	---------



OTHER

Diesel tank	60
Hydro tank	35

WEIGHT

Max. Lifting capacity	2000
Own weight	6350

Technical drawing

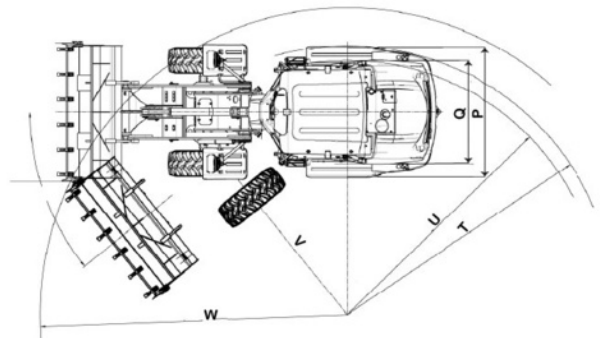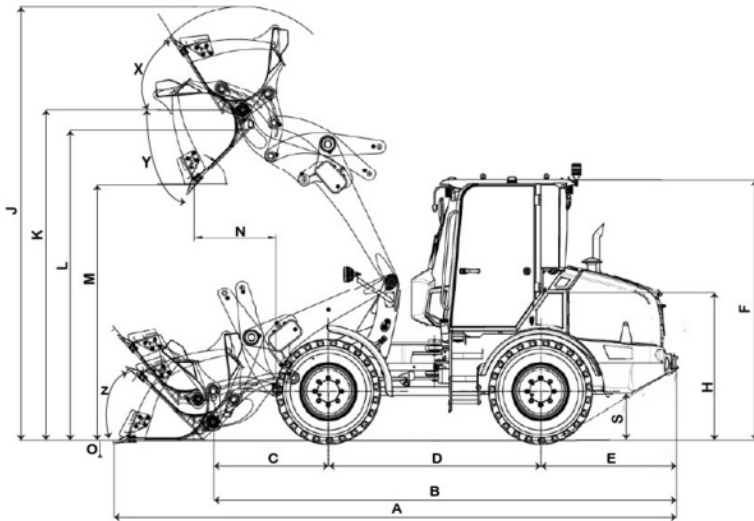

(A) Overall length with bin	5800
(D) Cradle base	2180
(E) Rear overhang	1410
(F) Height to top of roof	2690
(J) Total working height	4460
(L) Loading height	3400
(M) Ejection height	2630
(N) Range (m)	840
(P) Overall width	1970
(Q) Track width	1570
(S) Ground clearance	350
(T) Outer diameter	4080
(U) Turning circle	3860
(W) Rotation angle	39
(X) Tilting angle at max. lifting height	57
(Y) Tipping angle	45
(Z) Tilt-in angle	50

Pictures



